

Modular speed ramp 10 cm (pedestrian crossing version)

Purpose:


- slowing down in the lane area, raised pedestrian crossing

Place of production:

Geyer & Hosaja Sp. z o. o.
Ul. Gorliczyńska 157
37-200 Przeworsk

Material:

Vulcanised rubber
(wear layer)
SBR rubber granulate
PUR resin
Reflective tape 3M
Metal reinforcement for assembly

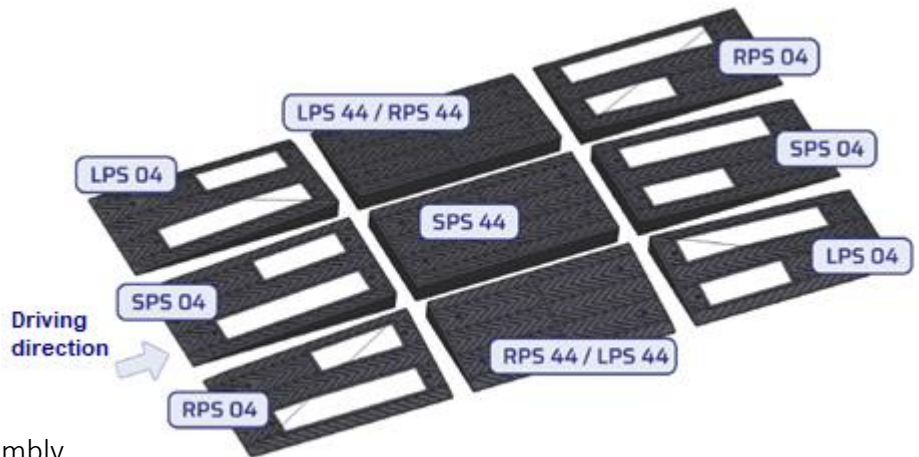**Dimensions:**

Item name	Length (mm)	Width (mm)	Height (mm)	Weight (kg)
1. SPS 04	1000	500	0-100	35,5 ±0,5
2. SPS 44	1000	500	100	53,5 ±2
3. LPS 04	1000	500	0-100	28,5 ±0,5
4. LPS 44	1000	500	100	35,5 ±0,5
5. RPS 04	1000	500	0-100	28,5 ±0,5
6. RPS 44	1000	500	100	35,5 ±0,5


Colour:

black/ red/ white
white/ yellow 3M reflective tape

Technical parameters:

Parameters	Value	Unit	Standard / Method
Tensile strength (wear layer)	≥ 5,0	MPa	PN-ISO 37
Hardness	≥ 60	°ShA	PN-EN ISO 868:2005
Water absorption	≤ 2	%	PN-EN ISO 62
Tolerance - length, width, height	± 2	%	of nominal
Tolerance- weight	± 2	%	of nominal

Technical drawings:

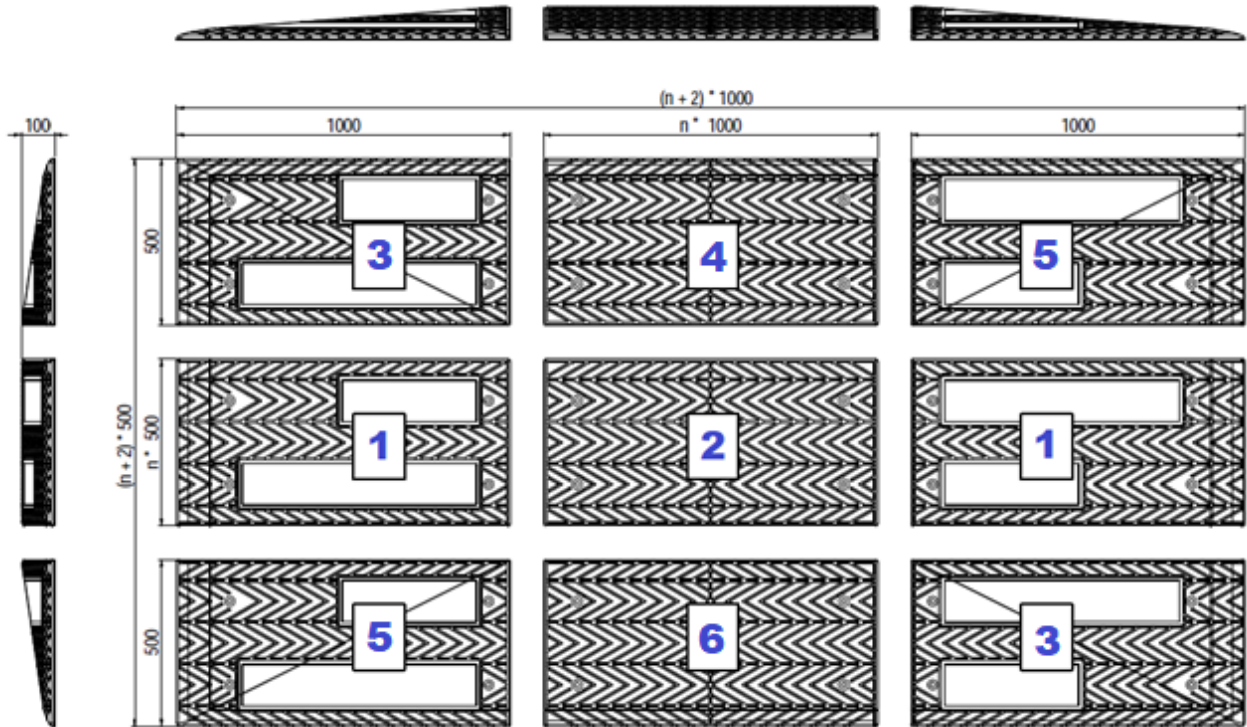

Packing:

Packed in a cardboard box on a Euro pallet in quantities depending on the order.

Description on the pallet with the name of the product, its quantity, batch number and packing date.

Other packaging is possible on request

Identification:

Product- on the underside of the product information about the date of production.

Pallet- product name, quantity, pallet identification number, packing date, quality control stamp.

Storage:

The products should be stored on pallets in protective film and protected from external weather conditions.

The products may be stored for a longer period of time only in closed, ventilated rooms without humidity, after removing the protective film. Storage temperature: max 40 °C

Health, safety and fire conditions:

Conditions for storage and use of the product- must meet all requirements for storage and use of rubber materials.

Installation / Use:

The product should be installed in accordance with the instructions available on the website <https://youtu.be/2Xbly46Q02U>



In order to ensure effective protection of the vehicle against damage and effective fulfilment of the function of individual elements of the product, it is recommended to drive over the speed ramp at an even speed in accordance with the road traffic regulations. Braking on the speed ramp is prohibited.